



PASS & SEYMOUR® Hard Use Spec Grade Plug Load Controllable Receptacles

5262CH, 5362CH, 5262CD, 5362CD
TR5262CH, TR5362CH, TR5262CD, TR5362CD

Durable receptacles designed for energy savings.

These durable, dependable receptacles feature a permanently marked, differentiated solution that meets all necessary code requirements. The controlled receptacle marking printed on the face of the receptacle is both NEMA-approved and compliant with the National Electrical Code®, CA Title 24, and ASHRAE Energy Efficiency Standard 90.1. This clear, permanent marking helps end-users differentiate controlled receptacles from others. Corrosion-resistant plated steel straps and high-strength nylon faces make these receptacles perfect for any hard use application. They feature one-piece, triple-wipe brass contacts for lasting retention. And screw-pressure-plate back wiring makes installation fast and easy.



FEATURES & BENEFITS

.032 inch thick, brass, triple-wipe
power contacts for lasting retention.

**Permanent controlled
receptacle markings using
abrasion resistant ink.**

Two drive screws anchor strap
to back body and face where abrupt
removal torque is strongest.

**Can be wired to any number of
stand-alone** or system-based plug
load control solutions.

**CH Version Only: Split circuit tab
broken at the factory**, allowing half of
the receptacle to be controlled.



5362CDBK

Auto-ground clip
assures positive ground.

Controlled receptacle marking
is NEMA-approved and compliant with
2014 NEC®, CA Title 24, and ASHRAE
Energy Efficiency Standard 90.1.

Corrosion-resistant, plated steel strap
locked into face and back body to resist
pulling away from face/body assembly.

Strap tabs wrap around face
to prevent strap from separating from
face and back body.

**Tri-drive brass-plated terminal
screws. Two back-wire holes** for
more wiring flexibility.

Dual mechanical shutter system
to help prevent insertion of foreign
objects (for Tamper-Resistant models).

FIELD USES/VERTICAL MARKETS

■ Office ■ Education ■ Institutional ■ Hospitality/Lodging ■ MDU

**PASS & SEYMOUR®**

Hard Use Spec Grade Plug Load Controllable Receptacles

TECHNICAL INFORMATION

Catalog #	Ratings	Color	NEMA Config.
Half-Controlled Duplex Receptacles Back & Side Wire			
5262CHI	15A 125V	Ivory	5-15R
5262CHW	15A 125V	White	5-15R
5262CH	15A 125V	Brown	5-15R
5262CHGRY	15A 125V	Gray	5-15R
5262CHBK	15A 125V	Black	5-15R
5262CHLA	15A 125V	Light Almond	5-15R
5262CHGN	15A 125V	Green	5-15R
5362CHI	20A 125V	Ivory	5-20R
5362CHW	20A 125V	White	5-20R
5362CH	20A 125V	Brown	5-20R
5362CHGRY	20A 125V	Gray	5-20R
5362CHBK	20A 125V	Black	5-20R
5362CHLA	20A 125V	Light Almond	5-20R
5362CHGN	20A 125V	Green	5-20R

Catalog #	Ratings	Color	NEMA Config.
Dual-Controlled Duplex Receptacles Back & Side Wire			
5262CDI	15A 125V	Ivory	5-15R
5262CDW	15A 125V	White	5-15R
5262CD	15A 125V	Brown	5-15R
5262CDGRY	15A 125V	Gray	5-15R
5262CDBK	15A 125V	Black	5-15R
5262CDLA	15A 125V	Light Almond	5-15R
5262CDGN	15A 125V	Green	5-15R
5362CDI	20A 125V	Ivory	5-20R
5362CDW	20A 125V	White	5-20R
5362CD	20A 125V	Brown	5-20R
5362CDGRY	20A 125V	Gray	5-20R
5362CDBK	20A 125V	Black	5-20R
5362CDLA	20A 125V	Light Almond	5-20R
5362CDGN	20A 125V	Green	5-20R

Tamper-Resistant Half-Controlled Duplex Receptacles Back & Side Wire			
TR5262CHI	15A 125V	Ivory	5-15R
TR5262CHW	15A 125V	White	5-15R
TR5262CHGRY	15A 125V	Gray	5-15R
TR5262CHLA	15A 125V	Light Almond	5-15R
TR5362CHI	20A 125V	Ivory	5-20R
TR5362CHW	20A 125V	White	5-20R
TR5362CH	20A 125V	Brown	5-20R
TR5362CHGRY	20A 125V	Gray	5-20R
TR5362CHBK	20A 125V	Black	5-20R
TR5362CHLA	20A 125V	Light Almond	5-20R

Tamper-Resistant Dual-Controlled Duplex Receptacles Back & Side Wire			
TR5262CDI	15A 125V	Ivory	5-15R
TR5262CDW	15A 125V	White	5-15R
TR5262CD	15A 125V	Brown	5-15R
TR5262CDGRY	15A 125V	Gray	5-15R
TR5262CDLA	15A 125V	Light Almond	5-15R
TR5362CDI	20A 125V	Ivory	5-20R
TR5362CDW	20A 125V	White	5-20R
TR5362CD	20A 125V	Brown	5-20R
TR5362CDGRY	20A 125V	Gray	5-20R
TR5362CDBK	20A 125V	Black	5-20R
TR5362CDLA	20A 125V	Light Almond	5-20R



For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®

Hard Use Spec Grade Plug Load Controllable Receptacles



DIMENSIONS

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Fed Spec WC596.
CSA Certified File Number LR16063, Standard CSA-C22.2 No. 42 General Use Receptacles.
Conforms to NEMA WD-1 and WD-6.

Performance

Electrical

Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical


Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only.
Product Identification	Ratings are permanent part of the device

Environmental


Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

Materials

Face	Nylon
Back Body	PVC
Line Contacts	.032 688 Brass
Mounting Strap	.042" Zinc-Plated Steel
Ground Contacts	.040" 688 Brass
Pressure Plate	.080" Steel
Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel Plated Steel)
Ground Screw	#8 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel
Mounting Screws	Tri-Drive Steel
Ink	Pad Printed
Tamper-Resistant Shutters	Thermoplastic (for TR models)

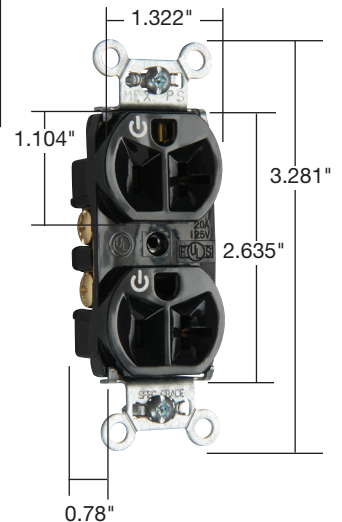

5362CDBK

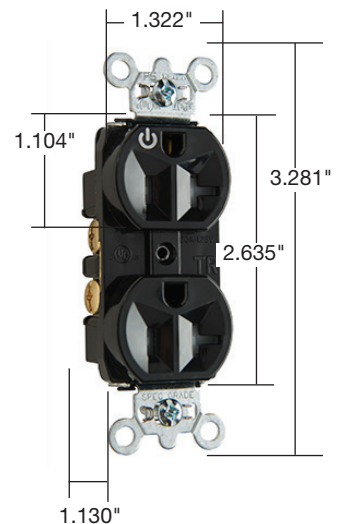


TR5362CHBK

Warranty

1 Year

PLUG LOAD CONTROLLABLE RECEPTACLES WIRING DIAGRAM

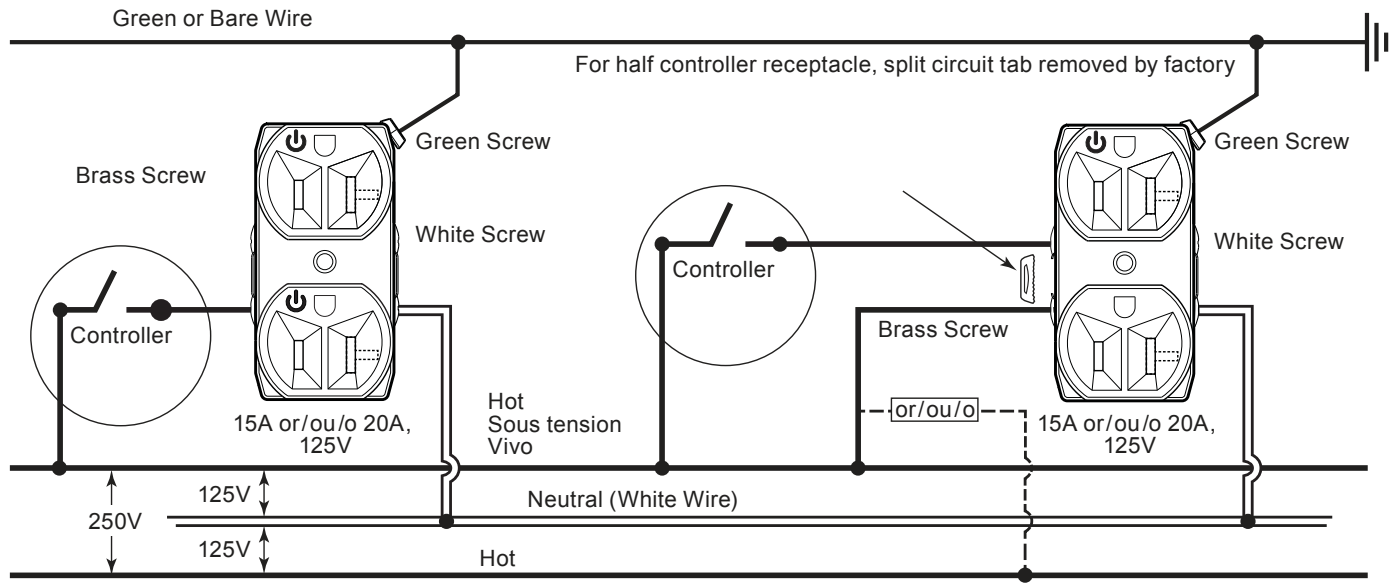

ALSO AVAILABLE...

- USB Charging Devices
- Hospital Grade Devices
- SPD & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca