

8/69


INTERIM DATA SHEET

Furnish and install as shown on the plans
ellipsoidal reflector spotlights as herein specified,
consisting of the following: a sheet steel housing
supported by an iron yoke; two single pole recessed
contact sockets for a 300/400 watt T4 tungsten halogen
lamp; a specular Alzak[®] aluminum, ellipsoidal reflector;
four individually operated, heat resisting framing
shutters with external, insulated handles; a focus
adjustment thumb screw knob on the lens tube; two 3½"
plano-convex heat resisting lenses; color frame grooves;
and 36" silicone rubber leads properly stripped and
tinned within a silicon fabric sleeve. Units shall be
equipped with a "C" clamp, a 20 amp., three pole
connector and metal color frame(s).


When using an EHR (400T4Q/CL) 400 watt 2000 hour lamp,
the units in this series shall perform as follows:

<u>CATALOG NUMBER</u>	<u>FIELD ANGLE</u>	<u>CANDLEPOWER</u>
1340	45°	9,600
1341	36°	13,000
1342	26°	20,000
1343	18°	21,000

Units shall be Kliegl Quartz Klieglights

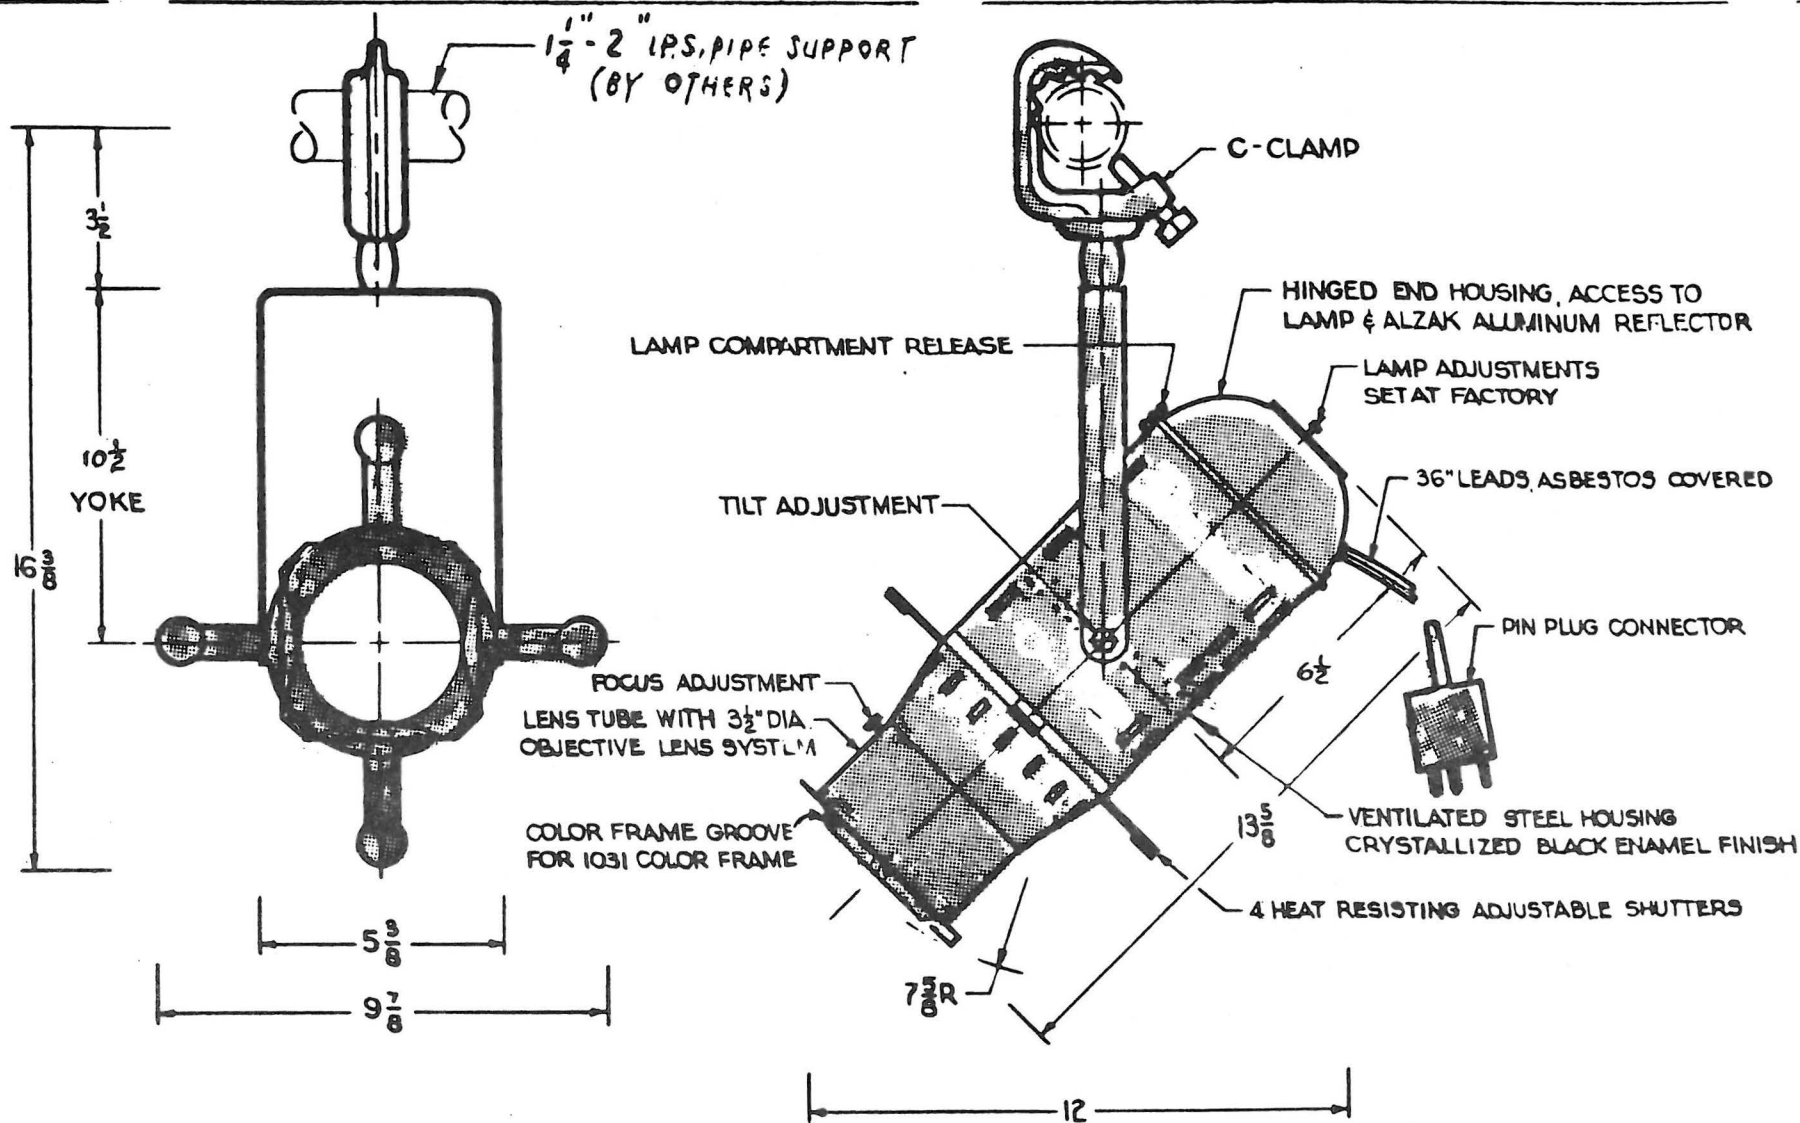


LAMPS	lighting 32-32 48TH AVE L.I.C.1. NEW YORK	JOB:	CAT # 1340/41	SO #
300 T4Q/CL 400 T4Q/CL - 2000HRS	KLIEGL BROS.		SCALE 1/4" = 1"	REF.
	DESCRIPTION: 1340/1341 ELLIPSOIDAL SPOTLIGHT QUARTZ-IODINE LAMP SERIES		DATE 5/24/85 SS ORIG DWG # 3629	DATE JOB DWG #

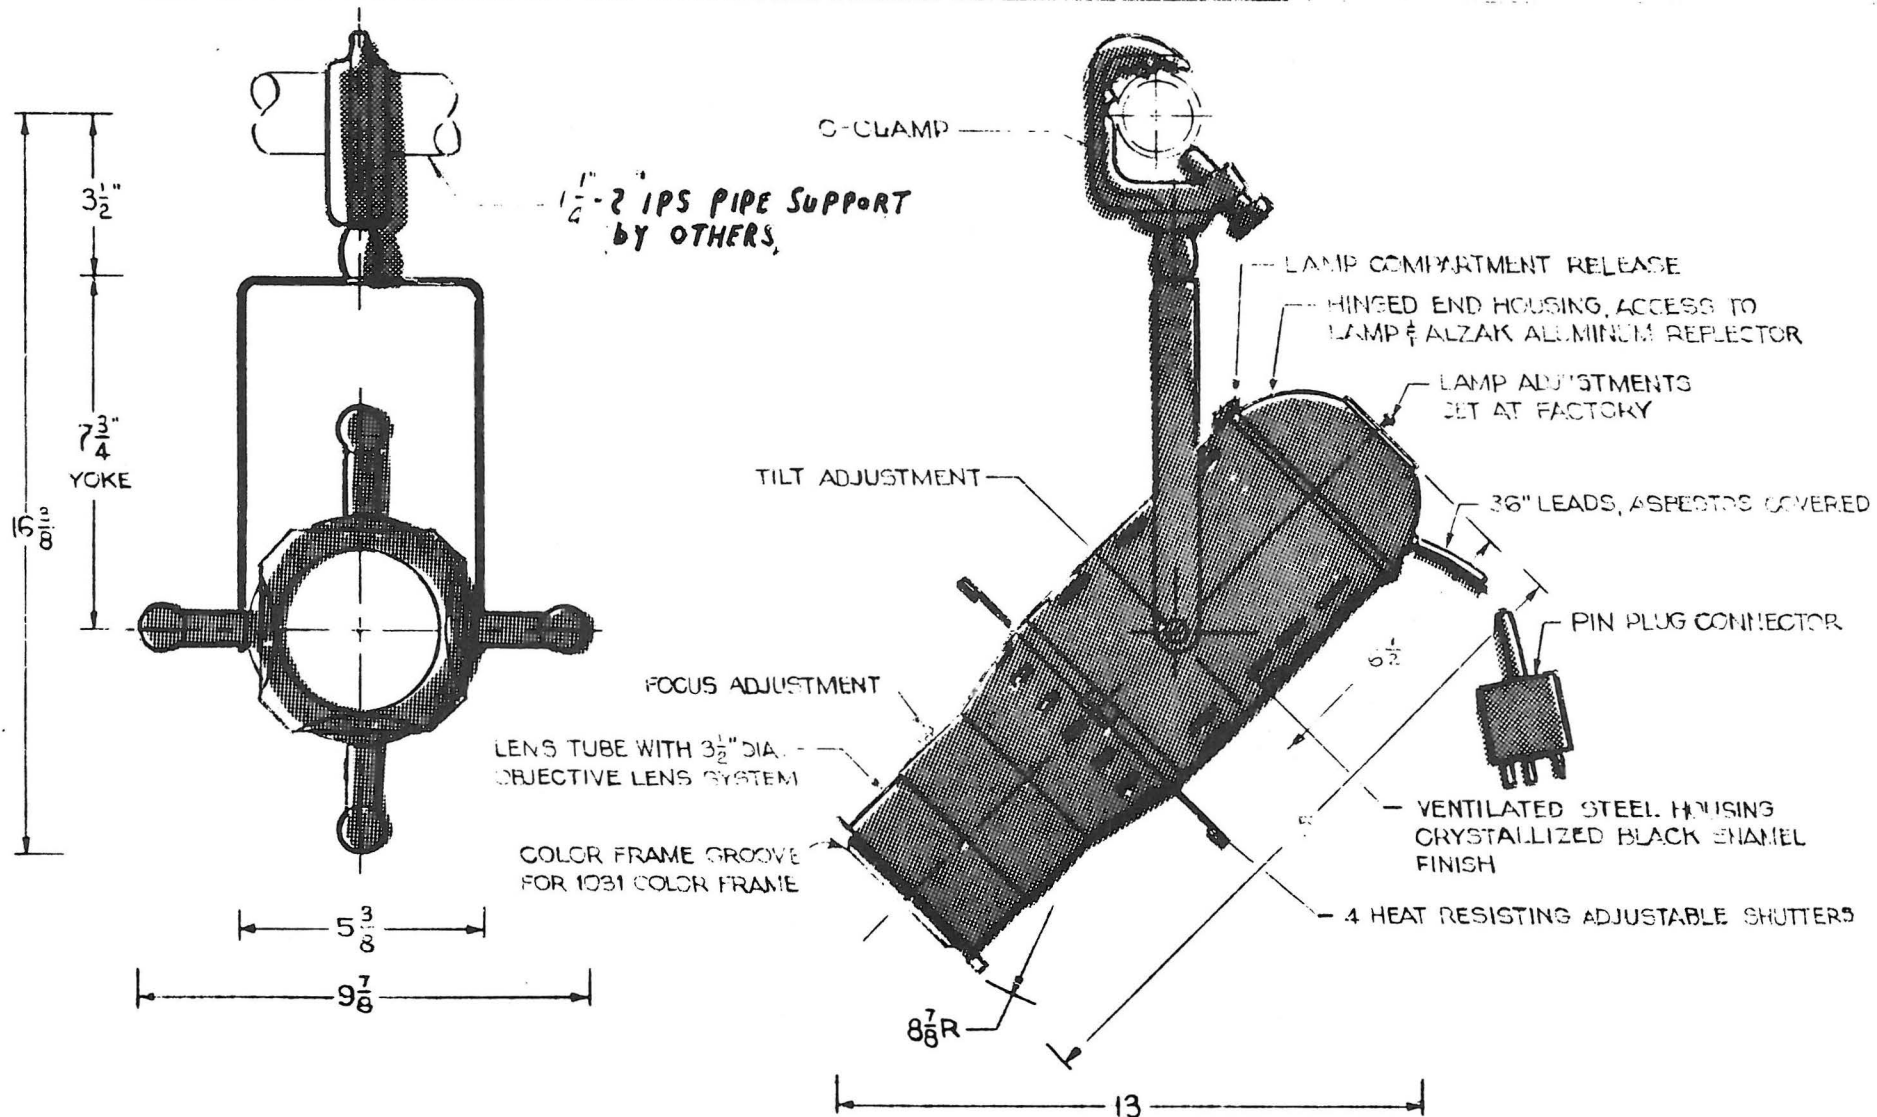


LAMPS	lighting 32-32 48TH AVE. L.I.C.I. NEW YORK	JOB:	CAT # 1342	SO #
300T4Q/CL 400T4Q/CL - 2000HRS	KIEGL BROS.		SCALE 1/4" = 1"	REF.
DESCRIPTION: 1342 ELLIPSOIDAL SPOTLIGHT QUARTZ - IODINE LAMP SERIES			DATE 5/26/65 SS	DATE
			ORIG. DWG. # 3630	JOB DWG #

CAT. No. 1343
 400T4/CL-2000HRS.
 FIELD ANGLE 18°
 LENS DIAMETER-3 1/2"
 UNIT DIAMETER-5 3/8"
 LENGTH-17 1/2"

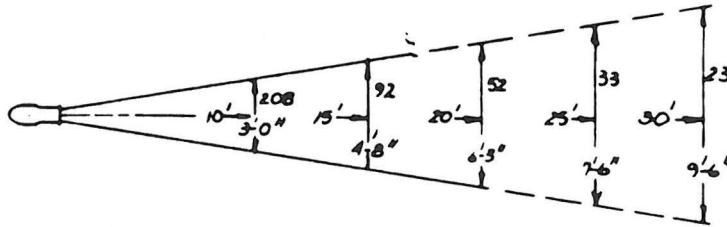


FOOTCANDLES
THROW DISTANCE
BEAM DIAMETER

CAT. No. 1342
 400T4/CL-2000HRS.
 FIELD ANGLE 26°
 LENS DIAMETER-3 1/2"
 UNIT DIAMETER-5 3/8"
 LENGTH-15"

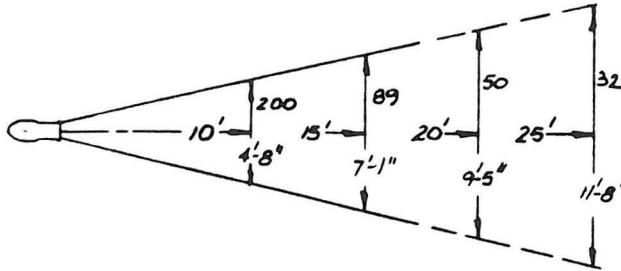


FOOTCANDLES
THROW DISTANCE
BEAM DIAMETER

CAT No. 1341
 400T4/CL-2000HRS.
 FIELD ANGLE 36°
 LENS DIAMETER-3 1/2"
 UNIT DIAMETER-5 3/8"
 LENGTH-13 5/8"

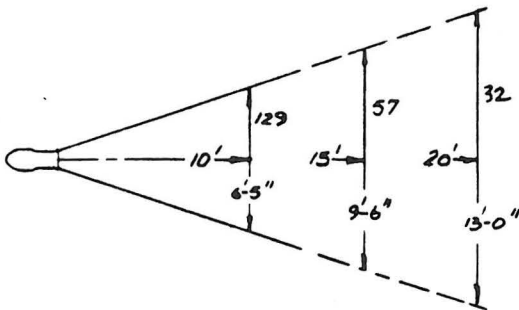

FOOTCANDLE
THROW DISTANCE
BEAM DIAMETER

CAT. No. 1340
 400T4/CL-2000HRS.
 FIELD ANGLE 45°
 LENS DIAMETER-3 1/2"
 UNIT DIAMETER-5 3/8"
 LENGTH-13 5/8"

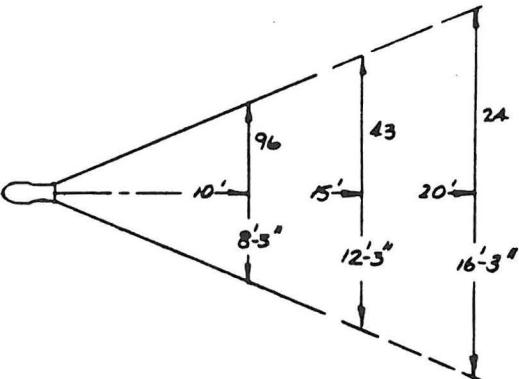

FOOTCANDLES
THROW DISTANCE
BEAM DIAMETER

REV 1 11-6-67	REV 2 12-2-67	REV 3	REV 4	REV 5	REV 6	REV 7	REV 8
NEW YORK LOS ANGELES			JOB		CAT		
KLIEGL BROS.					SCALE	1/8" = 1'	
DESCRIPTION:					DATE		10/17/66
KLIEGL #1340 SERIES ELLIPSOIDAL REFLECTOR SPOTLIGHTS DESIGNED FOR SHORT THROW DISTANCE					4286		