

A NEW TYPE OF SPOTLIGHT

"Z - LITE"

These units achieve the same purpose as ellipsoidal spots. Yet the long life of the lamps and the lamps abilities to burn in any position, make these spotlights cheaper to own and operate, and more versatile than the fresnel spotlight units.

These are an entirely new type of spotlight: Efficiency, economy, and versatility are their principal points of design.

ADVANTAGES OF THE Z-LITE:

- * 2000-Hour life lamp: Minimizing hourly lamp cost. Internal lamp reflections. Surface of the highest efficiency and renewed with lamp.
- * Burning position of lamp: Any position allows spotlight to be focused on any angle without deterioration of lamp.
- * Lamp available in 115, 120 and 125 volts service ratings. Accommodates latest or oldest power systems, and allows for variations in color temperature.
- * New 40° framing shutter design allows adjusting to more acute angles of image than previously possible.
- * Lamp rating and ventilation of spotlight allows unit to be used for commercial lighting purposes under prolonged burning periods without deterioration or loss of lamp.

6" 500 WATT Z-LITE (PATTERN PROJECTING SPOT)

The latest development in the lighting field—another exclusive from LITTLE STAGE LIGHTING CO. These units are designed to equal ellipsoidal spots in purpose and to operate more economically than any other unit of professional ability. Designed for throws up to 40 feet with a 28° spread. These units are useful for use as front lighting, from balcony, coves, side lighting on stage, as well as overhead lights.

Equipped with:

- * NEW exclusive "40°" 4 way framing shutters
- * NEW exclusive OVER-ALL ventilation
- * Single 6" x 8" step lens
- * Aluminum reflector
- * 500 watt PAR 64 lamp (rated life — 2000 hours), asbestos leads
- * Yoke suspension
- * Color frame




Z6-Y With yoke only
Z6-C With pipe clamp (as illustrated)

6" 500 WATT Z-LITE (PATTERN PROJECTING SPOT)

The latest development in the lighting field—another exclusive from LITTLE STAGE LIGHTING CO. These units are designed to equal ellipsoidal spots in purpose and to operate more economically than any other unit of professional ability. Designed for throws up to 25 feet and 50° spread, these units are useful for use as front lighting, side lighting on stage as well as overhead lights.

Equipped with:

- * NEW exclusive "40°" 4 way framing shutters
- * NEW exclusive OVER-ALL ventilation
- * Two 6" x 9" plano-convex lenses
- * Aluminum reflector
- * 500 watt PAR 64 lamp (rated life — 2000 hours), asbestos leads
- * Yoke suspension
- * Color frame

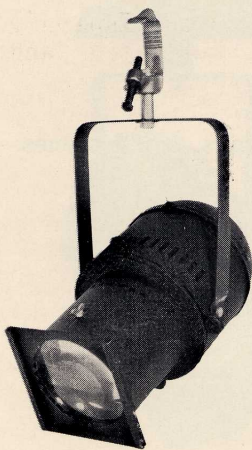

Z26-Y With yoke only
Z26-C With pipe clamp (as illustrated)